


SOLARIS SERIES

AREA LIGHTING | POST TOP, WALL MOUNT

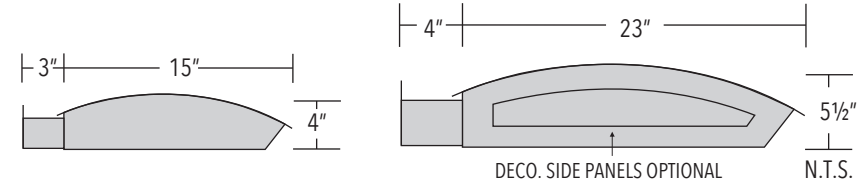

SLS SM

SLS LG

SPECIFICATIONS

LUMINAIRE All aluminum construction; heavy wall cast aluminum housing.

DRIVER Electronic LED driver, 120-277V
Options: 480V Driver, Dimming control 0-10V.

ELECTRICAL All components UL recognized. Luminaire shipped complete & ready to install.

FINISH Powder coat – Standard colors are Black, White, Dark Green & Dark Bronze. Custom colors available, consult factory. All exposed hardware shall be stainless-steel.

FEATURES + BENEFITS

- Industry leading LED systems
- High efficiency & energy savings
- Environmentally friendly
- Reliable & low-maintenance
- 7-year limited warranty
- UL Listed electrical components
- *Suitable for wet locations*

ORDER INFORMATION EXAMPLE: SLS LG-75W-5K-SMT-IV-PT-BLK-EMB

SERIES	WATTAGE	COLOR TEMP.	VOLTAGE	OPTICS	MOUNTING	FINISH	OPTIONS
SLS LG	5W-300W PLEASE SPECIFY	27K 2700K	SMT 120-277V	CL CLEAR LENS	PT POST TOP	BLK BLACK	DIM 0-10V DIMMING
SLS SM	5W-100W PLEASE SPECIFY	3K 3000K 35K 3500K 4K 4000K 5K 5000K CUSTOM COLOR TEMP. CONSULT FACTORY	480V	OPL OPAL LENS OF OPEN-FRAME TYPE II TYPE III TYPE IV TYPE V	WM WALL MOUNT PLEASE SPECIFY TENON SIZE OR POLE DIA.	WHT WHITE GRN DARK GREEN DBZ DARK BRONZE CC CUSTOM COLOR	BPC BUTTON PHOTO-CELL HSS HOUSE-SIDE SHIELD MS MOTION SENSOR EMB INTEGRATED EMERGENCY BATTERY



ECHO LIGHTING, INC.
Designers and Manufacturers
of Outdoor Lighting

Ph.: +1-323-890-9008
Fax: +1-323-890-1981
Email: info@echoltg.com

5618 E. Washington Blvd.
Commerce, CA 90040
www.echolighting.com